

**Calhoun: The NPS Institutional Archive** 

**DSpace Repository** 

Reports and Technical Reports

All Technical Reports Collection

1991-03

# Object-oriented modeling of the communications networks of the MAGTF

Bailey, Michael P.; Kemple, Michael G.; Sovereign, Michael

G.; West, Michael; Chase, Charles; Reese, Casey

Monterey, California. Naval Postgraduate School

http://hdl.handle.net/10945/30038

Downloaded from NPS Archive: Calhoun



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

> Dudley Knox Library / Naval Postgraduate School 411 Dyer Road / 1 University Circle Monterey, California USA 93943

http://www.nps.edu/library

NPSOR-91-10

## NAVAL POSTGRADUATE SCHOOL

Monterey, California



OBJECT-ORIENTED MODELING OF THE COMMUNICATIONS NETWORKS OF THE MAGTF

Michael P. Bailey, William Kemple, Michael Sovereign, Michael West, Charles Chase, Casey Reece

March 1991

Approved for public release; distribution is unlimited.

Prepared for:

Warfighting Center—Studies and Analysis MCCDC, Quantico, VA 22134-5001

FedDocs D 208.14/2 NPS-OR-91-10 FedCocs D 208. 14/2: NPS-OR-91-10

### NAVAL POSTGRADUATE SCHOOL, MONTEREY, CALIFORNIA

Rear Admiral R. W. West, Jr. Superintendent

Harrison Shull Provost

This report was sponsored and funded by the Warfighting Center—Studies and Analysis, MCCDC, Quantico, VA 22134-5001.

This report was prepared by:

## Unclassified

Securit	y Classificat	ion of this pag								
REPORT DOCUMENTATION PAGE										
1a Report Security Classification UNCLASSIFIED					1b Restrictive Markings					
2a Security Classification Authority					3 Distribution Availability of Report					
2b Declassification/Downgrading Schedule					Approved for public release; distribution is unlimited					
4 Performing Organization Report Number(s) NPSOR-91-10					5 Monitoring Organization Report Number(s)					
6a Name of Performing Organization 6b Office Symbol					7a Name of Monitoring Organization					
Naval Postgraduate School (If Applicable) OR 6c Address (city, state, and ZIP code)					Warfighting Center — Studies and Analysis					
Monterey, CA 93943-5000					7b Address (city, state, and ZIP code) MCCDC, Quantico, VA 22134-5001					
		g/Sponsoring Org fighting Cen		8b Office Symbol	9 Procurement Instrument Identification Number					
	CCDC	nghing Cen	iter,	(If Applicable) OR/Ba	M9545091WRR1AK2					
		ate, and 7.1P co	de) O1121		10 Source of Funding Numbers					
8c Address (city, state, and ZIP code) Quantico, VA 22134-5001					Program Element Number Project No Task No Work Unit Accession No					
				Desired Nomber			0.2.0.1.00000001710			
				D In Com Con Vini	WARRING A	VD 61				
11 Title (Include Security Classification) OBJECT-ORIENTED MODELING OF THE COMMUNICATIONS NETWORKS OF THE MAGTF										
12 Personal Author(s) Bailey, Michael P.; Kemple, William; Sovereign, Michael; West, Michael; Chase, Charles; Reece, Casey										
	ype of Repor	rt 13b From	Time Co	overed To	14 Date of Report (year 1991, March	r, month,da	y)	15 Page Count		
16 Su	pplementary l	Notation The	views e	xpressed in this paper	are those of the aut	hor and d	o not re	flect the official		
				nt of Defense or the U						
17 Cc	osati Codes			ject Terms (continue on re						
Field	Group	Subgroup		t-oriented simulation,						
The Marine Air-Ground Task Force (MAGTF) is supported by a communications system comprised of heterogeneous links and widely shared network resources. In this work, we describe our approach to modeling the MAGTF communications network. This model employs a new concept of workload modeling which we have developed. We provide a mathematical development of our measures of effectiveness and show how our model will be used to seek improvement in MAGTF communications performance.										
20 D	istribution/A unclassified/u	· —	Abstract same as r	epont DTIC users	Unclassified	Classification	on			
					22b Telephone (Include Area code) 22c Office Symbol OR/Ba					
DD FORM 1473, 84 MAR  83 APR edition may be used until exhausted  security classification of this page										
	All other editions are obsolete Unclassified									



## Object-Oriented Modeling of the Communications Networks of the MAGTF

Michael Bailey, William Kemple, Michael Sovereign, Captain Michael West, USMC, Captain Charles Chase, USA Department of Operations Research, Naval Postgraduate School, Monterey, CA Captain Casey Reece, USMC

MAGTF Warfighting Center, Proponency and Requirements Branch, C<sup>4</sup>I Section, Quantico, VA

#### Abstract

The Marine Air-Ground Task Force (MAGTF) is supported by a communications system comprised of heterogeneous links and widely shared network resources. In this work, we describe our approach to modeling the MAGTF communications network. This model employs a new concept of workload modeling which we have developed. We provide a mathematical development of our measures of effectiveness and show how our model will be used to seek improvement in MAGTF communications performance.

#### 1 Introduction

A Marine Air-Ground Task Force (MAGTF) is the organizational structure used for nearly all operational missions undertaken by U.S.M.C. forces. Independent of the size of the force, the MAGTF is always composed of four elements, the Command Element (CE), the Ground Combat Element (GCE), the Aviation Combat Element (ACE), and the Combat Service Support Element (CSSE). Whenever Marine Corps forces are called into action, they are organized under the MAGTF structure.

Experience indicates that the MAGTF is most effective in combat when employed as a single entity-a strategically mobile, combined arms, air-ground-logistics combat force under a single commander. To be effective, this commander must have the necessary command and control assets to direct the force.

The neurological component of the MAGTF is the Command, Control, Communications, Computer, and Intelligence system. Within this complex system, communications represents the most tangible, and the most hardware dependent subsystem. The MAGTF's ability to communicate effectively is fundamental to successful mission execution. Much effort has been expended evaluating performance of MAGTF's, as well as other military organization's,

communication systems. Typically, these efforts involve stochastic modeling of the workload the communications system must handle. The performance is evaluated using analytic, approximation, Monte Carlo, or system simulation methods. To a large degree,

- the choice of evaluation technology,
- the development and implementation costs, and
- the degree of acceptance and usability of the end product

are dictated by the degree to which the workload model reflects reality.

At one end of the fidelity spectrum, there exist models which have stationary arrival processes of message-sending requirements. These processes are typically stationary Poisson. This simple workload model is used because evaluating the resulting communications traffic process is analytically tractable. This approach usually allows for relatively inexpensive development at the expense of the degree to which the real system is accurately modeled, the usability of the results, and acceptance of the results by users. Examples of this approach are [2] and [6].

At the other extreme, we have models which attempt to simulate the evolution of combat, thereby inducing a realistic communications workload. Some of the drawbacks of this approach are readily apparent. In order to generate the communications traffic, this combat simulation must be of high resolution. Thus, realisticness comes with significant model development and programming costs. Such models require voluminous input data, to which confidence in model output is very tightly linked. Conclusions drawn from the results of high resolution combat models are valid only for the specific scenario used.

Furthermore, inclusion of details costs computational effort with each replication of the (obviously terminating) scenario, resulting in extremely large computing requirements for meager accuracy. This type of model displays hard-to-quantify effectiveness, as the engagement modeled can take several distinct turns during its evolution. Most frustrating, it becomes very difficult to attribute changes in performance to variations in input—experimental designs must be extremely weak. Examples of high resolution combat models for communications performance analysis are the Network Assessment Model [4], and a traffic simulator developed at NRL [5].

In this paper, we describe a model of MAGTF communications traffic which occupies the middle ground between the extremes of simple, analytically tractable Poisson models and high resolution combat models. Our model uses a paradigm of Marine Broad Operational Tasks (MBOTs), Broad Operational Subtasks (BOSTs), and Message Exchange Occurrences(MEOs). This framework is described in [8]. An MBOT is, as the name implies, a broad mission area that is undertaken by a group of units to satisfy a requirement. It is broken down into BOSTs, which represent the major component tasks required to fulfill the MBOT obligation. Each BOST comes with a set of communications requirements, its MEOs.

Among the details included in the specification of each MEO are the units and radio nets involved. Thus, we can generate communications traffic which is interdependent in a realistic way, without the onus of mimicking engagements. We may generate BOSTs in a static, stationary manner, and permit the MBOT/BOST/MEO structure to provide the realism we desire. Furthermore, we can generate BOSTs as dictated by a combat-model-like script and get all of the realism of a combat model without the large development costs. Finally, we may manipulate the rate of BOST generation in the time domain to facilitate a decision process which uses the model to compare alternatives.

In this work, we describe our object-oriented simulation model of the MAGTF communications process. We describe the development of appropriate effectiveness measure through the Modular C<sup>3</sup> Evaluation Structure (MCES) process (see [7]). Finally, we show some preliminary results generated by our model, and discuss the analysis of our model output.

## 2 Object Oriented Simulation

As our title indicates, we modeled the dynamic behavior of the MAGTF communications system using an object-oriented simulation language, in our case MODSIM II (see [3] for details of the MODSIM programming language). A full featured object-

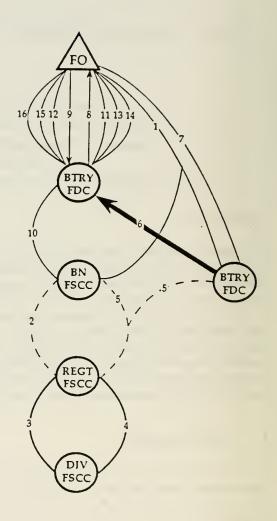


Figure 1: The Call For Fire BOST. Numbers correspond to MEO sequence numbers, while different line types indicate different radio nets.

oriented simulation language has several advantages over non-object-oriented simulation languages, and over special-purpose simulation languages, for modeling our particular system.

The primary advantage of object-oriented language is, of course, the existence of the object data type, first described in [1]. Stated simplistically, an object is a record data type with procedures attached called methods. Fields of the object act like fields of a record with one fundamental exception, only the object's methods can alter the object's fields. This seemingly harsh restriction forces the programmer to standardize the interface to the object through a definition module for the object. Thus, an object enjoys a degree of autonomy. This autonomy ultimately leads to inherently reusable object programming.

Object-oriented simulation programmers make heavy use of object inheritance, where one object type assumes all the properties (fields and methods) of another, then alters some of these properties or adds more. This allows polymorphic object handling, where collections of objects of different object types share an interface.

For example, we might have two unit types, rifle company and tank platoon, which are object types derived from the more general unit object type. If we ascribe a method called receive\_order to the unit object, then we can invoke receive\_order for any object whose type inherits the unit object type. If, at some point in future development, we wish to add on Light Armored Infantry (LAI) platoon to the simulation, we may choose to inherit the properties of the tank platoon object as a starting point. We could tell the LAV platoon to receive\_order without compunction, for we know LAV platoons inherited receive\_order from tank platoons which inherited receive\_order from units, where this capability was originally defined.

Like all process oriented (i.e. not discrete event) simulation paradigms, the object-oriented simulation modeling framework has occasion to freeze a process until some time passes, some condition becomes true, or some resource is available. The utility offered by object-oriented simulation is that this waiting is done by a method of an object. In MODSIM II, an object can have several concurrent methods waiting for different things (this capability is not shared by SIM-ULA, where an object may have only one waiting method). This again allows for autonomy of objects, promoting reusable object code.

In sum, object-oriented simulation provides several features which enable the simulation programmer to expand a simple model into one which is more complex, and to do so with confidence. This degree of modularity has enabled us to quickly develop our model using three programmer-authors, with graceful buildup due to the explicit interactions of the objects. Our simulation will be reusable by our sponsor to pursue further projects in MAGTF communications.

## 3 Major Model Components: Units, Nets, and Traffic Generation

The model we have developed has three fundamental object types, units, nets, and the traffic generation object. In this section, we provide the salient details of the model by describing the properties of these

three object types.

#### 3.1 Traffic Generation

In order to test the value of a specific communications architecture, we must stress the system in a realistic fashion. However, we wish our conclusions to be independent of a specific scenario of events. The use of the MBOT/BOST/MEO framework was briefly described in the introduction. The tasks that the MAGTF communications network will undertake have been identified and categorized in [8]. An example of an MBOT is Artillery Call For Fire, with the constituent BOST Standard Call For Fire. This BOST might be initiated by a Battery Forward Observer (BTRY FO). It involves the cooperation of the Artillery Battalion Fire Direction Center (BN FDC), the Battalion, Regiment, and Division Fire Support Coordination Centers (BN FSCC, REGT FSCC, DIV FSCC), and the Artillery Battery Fire Direction Center (BTRY ARTY FDC). The MEOs which are required to complete the Standard Call For Fire include the original call for fire, the clearing of the fire mission up the chain of command, the relaying of the clearance back down the chain, the spotting and firing directions exchanged between the BTRY FO and the BTRY ARTY FDC, and the end of mission and surveillance messages. There is some concurrency of MEOs in this mission, as well as a simple precedence structure between MEOs. This BOST involves four different nets, and is diagrammed in figure 1.

Each action is identified as a Task attached to one of the Message Exchanges of the MEO. Each specified message has associated with it a message format with the content identified message sender, receiver, radio net to be used, and duration. Some Tasks are pursued concurrently, while some have precedence over others.

To generate traffic for the MAGTF communications system, we generate a sequence of BOSTs occurring at each unit. These BOSTs will generate the specified MEOs, with the associated message traffic requirements and sequence.

Each unit, j, in the MAGTF has a rate of occurrence for each BOST, i, given as  $\lambda_{i,j}$ . Combination (i,j) initiates with this rate relative to the other BOSTs and the other units. Our traffic generation scheme must produce BOST initiations at each of the units at the specified relative rates.

For efficiency and centralization of control, we will generate BOSTs in a central process:




Figure 2: The relationship of the traffic generator, units, and the net resource for one net.

while (not TIME'S UP) sample DELAY with mean =  $1/\lambda r$  wait DELAY choose a BOST and UNIT tell UNIT to INITIATE\_BOST end while

Algorithm 1. The heart of central BOST generation process

where  $\lambda = \sum_{(i,j)} \lambda_{i,j}$ . For the present, we will assume that r=1. Given BOST i and unit j, the BOST-unit combination (i,j) is chosen with probability  $\lambda_{i,j}/\lambda$ . If the central delays are chosen to be exponential, then each BOST-unit initiation is a filtered Poisson process. Otherwise, each time between BOST-unit initiations is a sum of a geometric number of iid delays. The distribution of BOST instances is pictured in figure 2.

#### 3.2 Nets

Radio net transmission time is the only limited resource in our communications system model. A net may be thought of as a one-talker-at-a-time party line. Units connected to the net, called subscribers, all hear every message transmitted on the net, while only one subscriber may transmit at any time.

The nets in our model use a highest-priority-first discipline, which may be slightly more orderly than the real system. When an opportunity for transmission takes place, the net polls each of the subscribers and chooses a unit with a waiting highest-priority message at random. This queuing discipline is easily varied by changing the ExecuteBusyPeriod method of the net.

#### 3.3 Units

The unit object type is the base type from which all of the MAGTF units are derived. Instances of unit objects range from a platoon object ( $\approx 45$  marines) to a division object ( $\approx 19,000$  marines and sailors). The communications equipment owned by a unit is housed in a radio array. Each radio is, in turn, connected to a radio net. The differences between units are the composition of the radio array, the rate of BOST initiation for each type of BOST, and the net membership of the radios owned by the unit.

Each unit is stimulated by the traffic generator by having a stream of BOST initiations sent to it. The unit then determines the first MEO of the BOST to pursue, finds all of the receivers which must receive the MEO, and submits the MEO for transmission on all of the nets required to reach the receivers. There are circumstances under which the unit will not be able to reach some of the intended receivers on the net specified in the BOST. Thus, the unit contains a complex routing mechanism which determines the sequence of units who will relay the BOST to the intended receiver.

Each BOST is pursued via the execution of MEOs between units. After a unit receives an MEO, it consults the BOST to determine the next MEO. It determines the appropriate net(s) using its routing mechanism, then submits this new MEO to the appropriate set of radios, one radio per radio net. The radio acts as a prioritized queue of MEOs, as well as possibly initiating busy periods of the attached radio net.

## 4 Measuring Effectiveness of the Communications Network

Each generated instance of a BOST has an object called a Timer attached. The Timer is created at the time the BOST is generated. It waits a BOST-specified amount of time called the AllotedTime of the BOST. During this time, the pursuit of the BOST is considered penalty-free. However, after AllotedTime has elapsed, the timer tells the PenaltyAccumulator to assess a BOST-specified OneTimePenalty. From this point forward, the lateness of the BOST costs an additional BOST-specified PenaltyRate. This rate is assessed until the BOST is completed successfully, or it expires due to excessive lateness.

Thus, the PenaltyAccumulator records a sample path of the penalty process. The long-run mean rate of penalty accrual reflects the degree to which the




Figure 3: Example penalty process.

network is functioning properly. If a large amount of penalty is being accrued constantly, the BOST deadlines are consistently being violated. The sources of large consistent penalty accrual must be investigated, so that network designers can determine if the specified deadlines are unrealistic, if certain nets or units are consistently resource constrained, or if some BOSTs can be redesigned by increasing task concurrency or changing task structure so that deadlines can be met.

Note that we have allowed ourselves some flexibility in the pace at which workload is created by including the parameter r in algorithm 1. By manipulating r, we may be able to efficiently select the best performer from a set of proposed communications architectures.

## 5 Results and Analysis

The penalty process is the sum of the discrete jump process corresponding to the OneTimePenaltys which occur and the piecewise linear function with slope equal to the sum of the PenaltyRates being assessed at any time. An example of the beginning of a penalty process sample path is shown in figure 3.

For constant workload intensity r, we can analyze the penalty rate process using standard autoregressive methods, jackknifing, or using sample path sectioning (batching), to determine  $\hat{p}(r)$  and  $\hat{\sigma}_{\hat{p}(r)}$ . In each case, we separate the sample path timeline into small intervals or sections which we use as samples. We can statistically or graphically determine the duration of the influence of initial conditions, which cause a negative bias in the estimation of  $\hat{p}(r)$ , see [9]. Let T be the time we simulate the process, and suppose that the initial conditions are determined to

be without influence after  $\tau^*$  time units have clapsed. We will collect our sample on the interval  $[\tau^*, T]$ , and construct the point estimate

$$\hat{p}(r) = \frac{p(T) - p(\tau^*)}{T - \tau^*}.$$

The variance of this estimate can be constructed via one of the standard methods mentioned above.

## 6 Conclusion and Future Research

In this study, we have proposed a new paradigm for workload modeling in military communications systems which reflects the dynamics and dependencies of the actual system, while not requiring a complex, high resolution combat model. This workload model is facilitated by the MBOT/BOST/MEO structure described in [8]. The authors of this document unknowingly share in the credit for our model.

We presented an object-oriented model of the communications system which exploits the MBOT-/BOST/MEO structure, measured the performance of the system through characteristics of a penalty accumulation process, and proposed methods for analyzing the properties of this penalty process.

The ultimate purpose of any modeling effort is the support of a decision. In our case, the sponsor wishes to allocate advanced radio equipment to some subset of the units in the MAGTF. Because the compatibility of the old equipment with the new is one-way, the new equipment must be allocated to every radio in a net for the net to be considered improved. Thus, we are faced with a ranking and selection problem where the options are the various feasible allocations of the advanced equipment to the nets within the MAGTF. In the near future, we will develop selection mechanisms that operate on continuous penalty processes, selecting the best allocation of advanced equipment while minimizing the amount of computational work required.

#### References

- [1] Cox, B. J. 1986. "Message/Object Programming: An Evolutionary Change in Programming Technology," *IEEE Software*, Vol. 1, No. 1, pp. 50-61.
- [2] Madhow, U. 1987. Bounds and Asymptotic Results for the Performance of Asynchronous Frequency-Hop Packet Radio Networks, Defense Technical Information Center Technical Report DTIC AS-A182, University of Chicago.
- [3] MODSIM reference Manual, 1990. CACI Products Division, LaJolla, CA.
- [4] Executive Summary: The Network Assessment Model (NAM), Technical Report ND89-CBSF-0022, Ft. Gordon, GA.
- [5] Nair, R. R., M. A. Grimm, and E. L. Althouse. 1988. Discrete-Event Communication Network Simulator for the Naval Research Laboratory Test Bed System, NRL Memorandum Report 6360.
- [6] Noel, A. L. 1990. Performance Study of a Marine Expeditionary Force Radio System, Master's Thesis, Naval Postgraduate School, Monterey, CA.
- [7] Sweet, R., M. Metersky, and M. Sovereign, 1985. Command and Control Workshop, MORS, Washington, D. C.
- [8] Technical Interface Design Plan for Marine Tactical Systems (MTS TIDP), Volume II: Multiple Agency Message Exchange Sequences [DRAFT] 1990.
- [9] Welsh, Peter D. 1983. The Statistical Analysis of Simulation Results, The Computer Performance Modeling Handbook, Academic Press, Inc., New York.

## Biographies of the Authors

Michael Bailey is an Assistant Professor of Operations Research at the Naval Postgraduate School (NPS). He received his Ph. D. from the University of North Carolina in 1988. His interests are applied stochastic modeling and analysis, operational reliability, quality assurance, and emerging technologies in simulation modeling.

William Kemple retired from the Marine Corps in 1985, where he was a C<sup>3</sup> specialist. He then pursued his Ph. D. in Applied Statistics at the University of California at Riverside, and is now an Assistant Professor of Operations Research at NPS.

Michael Sovereign was Chairman of the C<sup>3</sup> Academic Group at NPS from 1982-87. He was a Principal Scientist at SHAPE Technical Center, 1987-89, and returned to the NPS in 1989 to continue his career as a Professor of Operations Research.

Captain Michael West is a Marine Corps Infantry Officer and a student of Operations Analysis at NPS. Captain Charles Chase is a U. S. Army Engineer Officer and a student of Operations Research at NPS. Both students will graduate with Master's Degrees in Operations Research in September, 1991.

Captain Casey Reece received her Master's Degree in Systems Technology, with emphasis in C<sup>3</sup> systems from NPS in 1989. She now is the C<sup>3</sup> Systems Officer at the MAGTF Warfighting Center, Proponency and Requirements Branch, C<sup>4</sup>I Section, Quantico VA.

### **DISTRIBUTION LIST**

Library (Code 0142)2
Naval Postgraduate School
Monterey, ČA 93943-5000
Defense Technical Information Center
Cameron Station
Alexandria, VA 22314
Office of Research Administration (Code 012)1
Naval Postgraduate School
Monterey, CA 93943-5000
Center for Naval Analyses1
4401 Ford Avenue
Alexandria, VA 22302-0268
Library (Code 55)1
Naval Postgraduate School
Monterey, CA 93943-5000
Institute for Defense Analysis1
1800 North Beauregard
Alexandria, VA 22311
Michael Page Bailey, Code 55Ba15
Naval Postgraduate School
Monterey, CA 93943-5000
J. George Shanthikumar1
The Management Science Group
School of Business Administration
University of California at Berkeley
Berkeley, Ca 93720
Kevin D. Glazebrook1
Department of Mathmatics and Statistics
University of Newcastle-upon-Tyne
Newcastle-upon-Tyne, NE1 7RN
United KINGDOM

Gideon Weiss	1
School of ISYE	
Georgia Tech	
Atlanta, GA 30332-0305	
David Goldsman	1
School of ISYE	
Georgia Tech	
Atlanta, GA 30332-0305	
R. Voltz, Code WF-13	1
USMC Warfighting Center, MCCDC	
Studies and Analysis	
Quantico, VA 22134-5001	



